




## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>7</sup> : <b>A47K 10/38</b>		<b>A1</b>	(11) International Publication Number: <b>WO 00/11998</b>
			(43) International Publication Date: 9 March 2000 (09.03.00)
(21) International Application Number: PCT/GB99/02853 (22) International Filing Date: 31 August 1999 (31.08.99) (30) Priority Data: 09/144,421          31 August 1998 (31.08.98)          US (71) Applicant: KIMBERLY-CLARK LIMITED [GB/GB]; Northop, Mold, Clwyd CH7 6WA (GB). (72) Inventor: KING, Timothy, James; Rose Cottage, Moss, Nr. Wrexham, Clwyd LL11 6EM (GB). (74) Agent: FRANK B. DEHN & CO.; 179 Queen Victoria Street, London EC4V 4EL (GB).		(81) Designated States: AE, AL, AM, AT, AT (Utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), DM, EE, EE (Utility model), ES, FI, FI (Utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).  Published With international search report.	

(54) Title: COLLAPSE RESISTANT CENTRE FEED ROLL AND PROCESS OF MAKING THEREOF

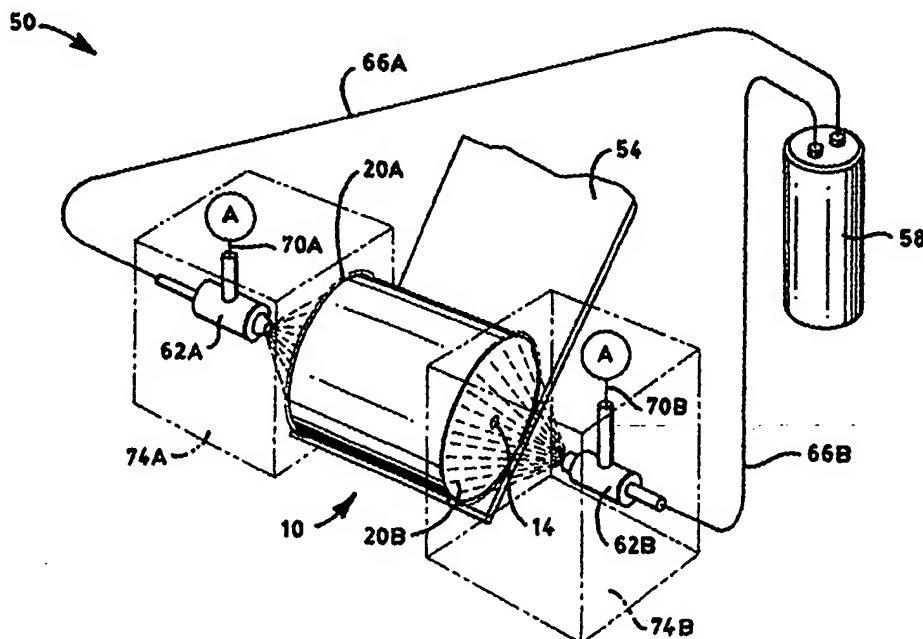

## (57) Abstract

The present invention provides a center feed roll (10) including a wound sheet material having lessened wound tension due to exposure to moisture. This exposure may prevent the inward collapse of sheet material into the core (12) of the center feed roll (10).

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

COLLAPSE RESISTANT CENTRE FEED ROLL AND  
PROCESS OF MAKING THEREOF

5           This invention generally relates to the field of paper making, and more specifically to paper rolls.

          Generally, center feed rolls are used to dispense sheet material, such as paper hand towels or toilet tissues. Desirably, center feed rolls dispense material  
10       from their center rather than their periphery, as opposed to conventional rolls. During dispensing, the roll housed in a dispenser may be stationary as material is removed from its core.

          Unfortunately, sometimes a center feed roll  
15       collapses inward towards its core during dispensing. In some cases, the collapsed material clogs the dispenser opening and prevents further dispensing. As a result, the dispenser is inoperable until the collapsed roll, which often must be disposed, is replaced.

20       Accordingly, there is a need for a center feed roll that resists core collapse thereby improving operability and reducing waste.

          As used herein, the term "comprises" refers to a part or parts of a whole, but does not exclude other  
25       parts. That is, the term "comprises" is open language that requires the presence of the recited element or structure or its equivalent, but does not exclude the presence of other elements or structures. The term "comprises" has the same meaning and is interchangeable  
30       with the terms "includes" and "has".

          The term "machine direction" as used herein refers to the direction of travel of the forming surface onto which fibers are deposited during formation of a material.

35       The term "cross-machine direction" as used herein refers to the direction, which is perpendicular and in the same plane as the machine direction.

- 2 -

As used herein, the term "cellulose" refers to a natural carbohydrate high polymer (polysaccharide) having the chemical formula  $(C_5H_{10}O_5)_n$  and consisting of anhydroglucose units joined by an oxygen linkage to form long molecular chains that are essentially linear. Natural sources of cellulose include deciduous and coniferous trees, cotton, flax, esparto grass, milkweed, straw, jute, hemp, and bagasse.

As used herein, the term "pulp" refers to processed cellulose by such treatments as, for example, thermal, chemical and/or mechanical treatments.

As used herein, the term "nonwoven web" refers to a web that has a structure of individual fibers which are interlaid forming a matrix, but not in an identifiable repeating manner. Nonwoven webs have been, in the past, formed by a variety of processes known to those skilled in the art such as, for example, meltblowing, spunbonding, wet-forming and various bonded carded web processes.

As used herein, the term "moisture" refers to a liquid, desirably aqueous, diffused or condensed in a relatively small quantity.

As used herein, the term "basis weight" (hereinafter may be referred to as "BW") is the weight per unit area of a sample and may be reported as gram per meter squared and abbreviated "gsm".

As used herein, the term "roll core" refers to the hollow region at the axis of a center feed roll. This region increases in size as sheet material is dispensed from the roll.

The problems and needs described above are addressed by the present invention, which provides a center feed roll as defined by the attached claims. The center feed roll includes a wound sheet material having lessened wound tension due to exposure to moisture. This exposure may prevent the inward collapse of sheet material into the core of the center feed roll.

- 3 -

Furthermore, the center feed roll may be exposed to humidity thereby increasing the moisture in the center feed roll. Moreover, the moisture may be applied by spraying a liquid. In addition, the liquid may be  
5 water, a starch solution, or an adhesive solution. Also, an effective amount of water may be added to the center feed roll for preventing the roll from collapsing inward.

A further embodiment of the present invention is a  
10 process for making a center feed roll collapse resistant. The process may include the steps of providing a center feed roll having rolled sheet material and exposing the rolled sheet material to moisture. Afterwards, the sheet material may release  
15 wound potential energy thereby lessening tension within the center feed roll and preventing the collapsing of the center feed roll during dispensing. Furthermore, exposing the rolled sheet material to moisture may further including spraying liquid on at least one end of  
20 the center feed roll. Moreover, both ends of the center feed roll may be sprayed with liquid. Also, the liquid may be water, a starch solution, or an adhesive solution. What is more, an effective amount of water may be sprayed on each end of the centre feed roll.  
25 Alternatively, moisture may be added to the center feed roll by exposing the roll to humidity. Still a further alternative, moisture may be added to the center feed roll during winding of the sheet material. Optionally, the moisture may be sprayed onto the edges of the sheet  
30 material while being formed into a center feed roll.

The present invention will now be described, by way of example only, with reference to the accompanying drawings, in which:

FIG. 1 is a perspective view of a center feed roll  
35 with a portion of sheet material dispensed from its center;

FIG. 2 is a perspective view of an exemplary

- 4 -

process for making a center feed roll collapse resistant; and

FIG. 3 is a close-up, perspective view of a sprayer applying water to the end of a center feed roll.

5 Referring now to the drawings, wherein like reference numerals designate corresponding structure throughout the views, and referring in particular to FIG. 1, there is depicted a partially dispensed center feed roll 10 desirably having wound sheet material 15  
10 forming a hollow core 12. Desirably during the manufacture of the roll 10, the sheet material 15 is wound around a mandrel, which may be a perforated, helical cardboard center 14 hereinafter described and depicted in FIGS. 2-3. This center 14 facilitates the  
15 winding of the sheet material 15 and is removed to begin dispensing. Thus, the removal of the center leaves a hollow core similar to the one depicted in FIG. 1.

The sheet material 15 depicted as partially dispensed may have perforations 18 dividing the sheet  
20 material 15 into segments, which may be torn for use. Also, the sheet material 15 may have edges 22, while the roll 10 may further include substantially circular ends 20A-B.

The roll 10 may be configured either substantially  
25 vertical as depicted in FIG. 1 or substantially horizontal during dispensing. The roll 10 may be from about 8 centimeter (cm) to about 46 cm wide and from about 8 cm to about 46 cm in diameter. Desirably, the roll is about 20 cm wide and about 20 cm in diameter.  
30 Furthermore, the sheet material 15 in the roll 10 may have a basis weight from about 15 gsm to about 50 gsm. Desirably, the sheet material 15 in the roll 10 has a basis weight of about 32 gsm.

Generally, the roll 10 is constructed from  
35 cellulose, and optionally, may include some nonwoven materials. The sheet material may have a machine direction stretch greater than about 30 percent. The

- 5 -

machine direction stretch is the percent a material will stretch as its breaking point over its length when taunt.

Although the inventor should not be held to any theory, it is believed that added moisture interacts with the cellulose fiber bonds in the paper, thereby releasing potential energy created during the winding of the roll 10. As a result, the tension in the roll 10 relaxes, particularly those rolls having a machine direction stretch greater than 30 percent. This relaxation stabilizes the core region during dispensing and prevents the inward collapse of the roll 10.

Moisture may be added to the ends 20A-B outside the center 14, to the center 14, or to the entirety of the roll 10. This moisture may be added after the roll 10 is formed or along the edges 22 of the sheet material 15 during winding when forming the roll 10. The moisture may be applied by spraying, sponging, dipping, or coating. Alternatively, the moisture may be applied by humidifying the roll 10 over several weeks. As an example, storing the roll 10 at least about 50 percent humidity for about 4-6 weeks may add sufficient moisture to prevent core collapse during dispensing.

The moisture may be water, starch solutions, or adhesive solutions. Desirably, ordinary tap water is applied to the roll 10 in an effective amount to prevent the inward collapse of the roll 10. The amount of moisture applied to the roll 10 may range from about 0.0031 grams of moisture per 1.0 gram of roll 10 to about 1.0 grams of moisture per 1.0 gram of roll 10. Desirably, the amount of moisture applied to the roll 10 may range from about 0.013 grams of moisture per 1.0 gram of roll 10 to about 0.05 grams of moisture per 1.0 gram of roll 10. More desirably, the amount of moisture applied to the roll 10 is about 0.025 grams.

An exemplary process 50 for adding moisture to a center feed roll 10 is depicted in FIGS. 2 and 3. The

- 6 -

process 50 may include a chute 54, a pressurized water cylinder 58, sprayers 62A-B, water lines 66A-B, air lines 70A-B, and shields 74A-B. Desirably, the chute 54 positions a center feed roll 10 having a solid, cardboard center 14 between the two sprayers 62A-B. The roll 10 having about 32 gms sheet material 15 and a mass of about 1.6 kilogram may have a width of 20 cm and a diameter of 20 cm.

The water cylinder 58 may communicate with a pressurized air source (not shown). Water from the cylinder 58 ranging in pressure from about 70,000 Pascals to about 400,000 Pascals may be supplied through lines 66A-B to respective sprayers 62A-B. Also, pressurized air ranging in pressure from about 110,000 Pascals to about 700,000 Pascals is supplied through lines 70A-B to respective sprayers 62A-B. Desirably, the sprayers 62A-B apply water to the sides of the roll 10, but not its center 14. Applying water to the center 14 may loosen the adhesives in the cardboard center 14 and result in its buckling. Commonly available commercial sprayers may be used, but one desirable sprayer is sold under the trade designation SU-30 Spraying Systems Company of Wheaton, IL.

Desirably, a total of about 40 grams of water is added per roll 10. As a result, about 20 grams of water may be applied to each end 20A-B of the roll 10. Optionally, shields 74A-B are present to contain moisture and to minimize slip hazards around the chute 54. Once sprayed, the roll 10 may be removed from the chute 54. It is expected that the roll 10 having about an 80 mm core 12 would not collapse any more than about 5 mm after having been stored about 7 days. Although this process 50 has been described, one of ordinary skill in the art will readily recognize other alternatives of applying moisture to the roll 10.

The following method may be used to determine basis weight, which is the unit weight per area of sample.



- 7 -

The equipment used may be a circular precision cutter and an electronic balance capable of accurately weighing to 0.001 grams. Five samples may be prepared by using the circular cutting taking care to avoid any folds, wrinkles, or creases. The samples are cut having an area of 100 square centimeters. Desirably, samples are conditioned at laboratory conditions of about 22 degrees Celcius and about 50 percent relative humidity for 24 hours. The procedure entails placing each sample on the balance and recording the weight to three decimal places. The calculations are made by multiplying the weight by 100 to give results in grams per square meter. The mean and standard deviation for the 5 readings may be calculated to 1 decimal place.

Four sets of center feed rolls having an initial core diameter of about 80 millimeters were made from same sheet material, namely wood pump, having a basis weight of about 32 gsm, a mass of about 1.6 kilograms, and a machine direction stretch of about 20 percent. The sheet material forming these rolls was wound at about the same tension resulting in about 760 sheet segments per roll. These sheet segments were separated by perforations and may be used as hand towels for wiping up liquids.

Three sets were sprayed with about 20 to about 30 grams of tap water while one set was not sprayed. Each of the three sets having added water were sprayed at varying locations as depicted in Table 1.

- 8 -

TABLE 1

Roll Number	Location of Added Moisture
1	None
2	Sprayed to Both Sides of The Roll Outside the Center
3	Sprayed to The Sides Of The Sheet Material As Being Wound Around Cardboard Center To Form Roll
4	Sprayed to Both Sides Of The Roll At The Cardboard Center

After manufacture, and if applicable spraying, rolls in all four sets were wrapped with polyethylene preventing atmospheric moisture from penetrating the rolls. After four weeks, the rolls were unwrapped, had their cardboard helical center removed, and allowed to sit for ten minutes. Afterwards, the core collapse of the rolls was assessed by measuring the shortest diameter on each side of the roll. Thus, each tested roll had two diameter measurements.

Table 2 compares the average diameter Rolls 2-4 with added moisture versus Roll 1 without added moisture.

TABLE 2

	Roll 1	Roll 2	Roll 3	Roll 4
AVERAGE DIAMETER (millimeter)	54	67	67	73
STANDARD DEVIATION (millimeter)	10	7	10	4
NUMBER OF ROLLS	5	5	4	1
NUMBER OF MEASUREMENTS	10	10	8	2

As depicted in Table 2, Rolls 2-4 had a greater average diameter than Roll 1, thereby exhibiting less collapse. Thus, adding moisture to Rolls 2-4 reduced the amount of sheet material collapsing into the core of

- 9 -

the roll after four weeks.

Another set of rolls having about the same properties and made under substantially the same set of conditions as Rolls 1-4 were tested. No moisture was added to these rolls. Some of these rolls were wrapped while others were not. After four weeks, the rolls were unwrapped, had their cardboard helical center removed, and allowed to sit for ten minutes. Afterwards, the core collapse of the rolls was assessed by measuring the shortest diameter on each side of the roll. Thus, each tested roll had two diameter measurements.

Properties of these rolls, which included Roll 3, are depicted in Table 3:

TABLE 3

Roll Number	Initial Core Diameter (millimeter)	Wrapped	Basis Weight (GSM)
Roll 5	60	Yes	32
Roll 6	60	No	32
Roll 3	80	Yes	32
Roll 7	80	No	32
Roll 8	60	Yes	40
Roll 9	60	No	40
Roll 10	80	Yes	40
Roll 11	80	No	40

As previously mentioned, the wrapping on some of these samples prevented atmospheric moisture from reaching the center feed rolls. The humidity was approximately 50 percent for four weeks. Table 4 compares the average diameters of wrapped and unwrapped rolls.

- 10 -

TABLE 4

Roll Number	5	6	3	7	8	9	10	11
AVERAGE DIAMETER (millimeter)	46	51	54	58	50	54	49	59
STANDARD DEVIATION (millimeter)	7	8	10	6	4	3	9	12
NUMBER OF ROLLS	4	4	5	5	3	3	6	5
NUMBER OF MEASUREMENTS	8	8	10	10	6	6	12	10

Comparing Rolls 5 and 6, 3 and 7, 8 and 9, and 10 and 11, where the only significant difference between these pairs is the presence or lack of wrapping, the unwrapped Rolls 6, 7, 9 and 11 have slightly greater diameters than Rolls 5, 3, 8 and 10. Thus, these rolls exhibit slightly less collapse than rolls sealed with wrapping. It is believed that the unwrapped rolls were exposed to humidity while the wrapped rolls were not. This exposure resulted in moisture being added to the unwrapped rolls, and thereby reducing the amount of sheet material collapsing into the core of the roll.

While the present invention has been described in connection with certain preferred embodiments, it is to be understood that the subject matter encompassed by way of the present invention is not to be limited to those specific embodiments. On the contrary, it is intended for the subject matter of the invention to include all alternatives, modifications and equivalents as can be included within the scope of the following claims.

- 11 -

**CLAIMS:**

1. A center feed roll comprising a wound sheet material having lessened wound tension due to exposure  
5 to moisture thereby preventing the inward collapse of sheet material into the core of the center feed roll.
2. The center feed roll of claim 1 wherein the center feed roll is exposed to humidity thereby increasing the  
10 moisture in the center feed roll.
3. The center feed roll of claim 1 wherein moisture is added to the center feed roll during wounding of the sheet material.  
15
4. The center feed roll of claim 3 wherein moisture is sprayed onto the edges of the sheet material while being formed into a center feed roll.
- 20 5. The center feed roll of claim 1 wherein moisture is applied to the center feed roll by sponging, dipping or coating.
6. The center feed roll of claim 1 wherein the  
25 moisture is applied by spraying a liquid.
7. The center feed roll of claim 6 wherein the liquid is sprayed on one end of the center feed roll.
- 30 8. The center feed roll of claim 6 wherein the liquid is sprayed on both ends of the center feed roll.
9. The center feed roll of any preceding claim wherein the moisture is water.  
35
10. The center feed roll of any preceding claim wherein the moisture is a starch solution.

- 12 -

11. The center feed roll of any preceding claim wherein the moisture is an adhesive solution.
- 5 12. The center feed roll of claim 9 wherein an effective amount of water is added to the center feed roll for preventing inward collapse of the center feed roll.
- 10 13. A process for making a center feed roll collapse resistant comprising the steps of:  
    providing a center feed roll having rolled sheet material; and  
    exposing the rolled sheet material to moisture whereby the sheet material upon exposure to moisture  
15 releases wound potential energy thereby lessening tension within the center feed roll and preventing the collapsing of the center feed roll during dispensing.
- 20 14. The process for making a center feed roll collapse resistant of claim 13 wherein the moisture is added to the center feed roll by exposing the roll to humidity.
- 25 15. The process for making a center feed roll collapse resistant of claim 13 wherein the moisture is added to the center feed roll during wounding of the sheet material.
- 30 16. The process for making a center feed roll collapse resistant of claim 15 wherein the moisture is sprayed onto the edges of the sheet material while being formed into a center feed roll.
- 35 17. The process for making a center feed roll collapse resistant of claim 13 wherein moisture is applied by sponging, dipping or coating.
18. The process for making a center feed roll collapse

- 13 -

resistant of claim 13 wherein exposing the rolled sheet material to moisture further comprises spraying liquid on the center feed roll.

5     19. The process for making a center feed roll collapse resistant of claim 18 wherein liquid is sprayed on one end of the center feed roll.

10    20. The process for making a center feed roll collapse resistant of claim 18 wherein both ends of the center feed roll are sprayed with liquid.

15    21. The process for making a center feed roll collapse resistant of claims 13-20 wherein the moisture is water.

22. The process for making a center feed roll collapse resistant of claims 13-20 wherein the moisture is a starch solution.

20    23. The process for making a center feed roll collapse resistant of claims 13-20 wherein the moisture is an adhesive solution.

25    24. The process for making a center feed roll collapse resistant of claim 21 wherein an effective amount of water is sprayed on each end of the center feed roll.

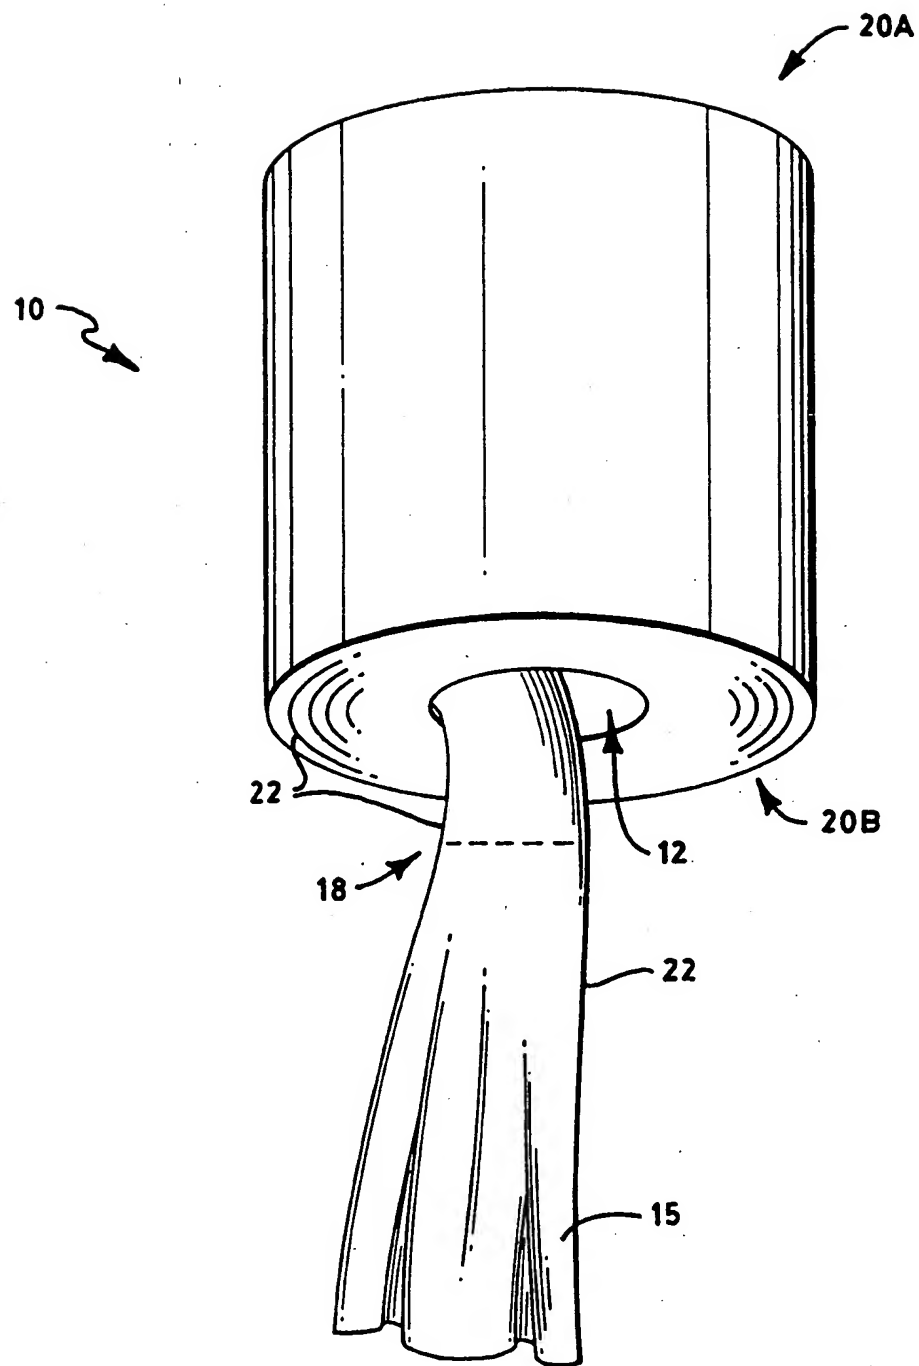


FIG. 1



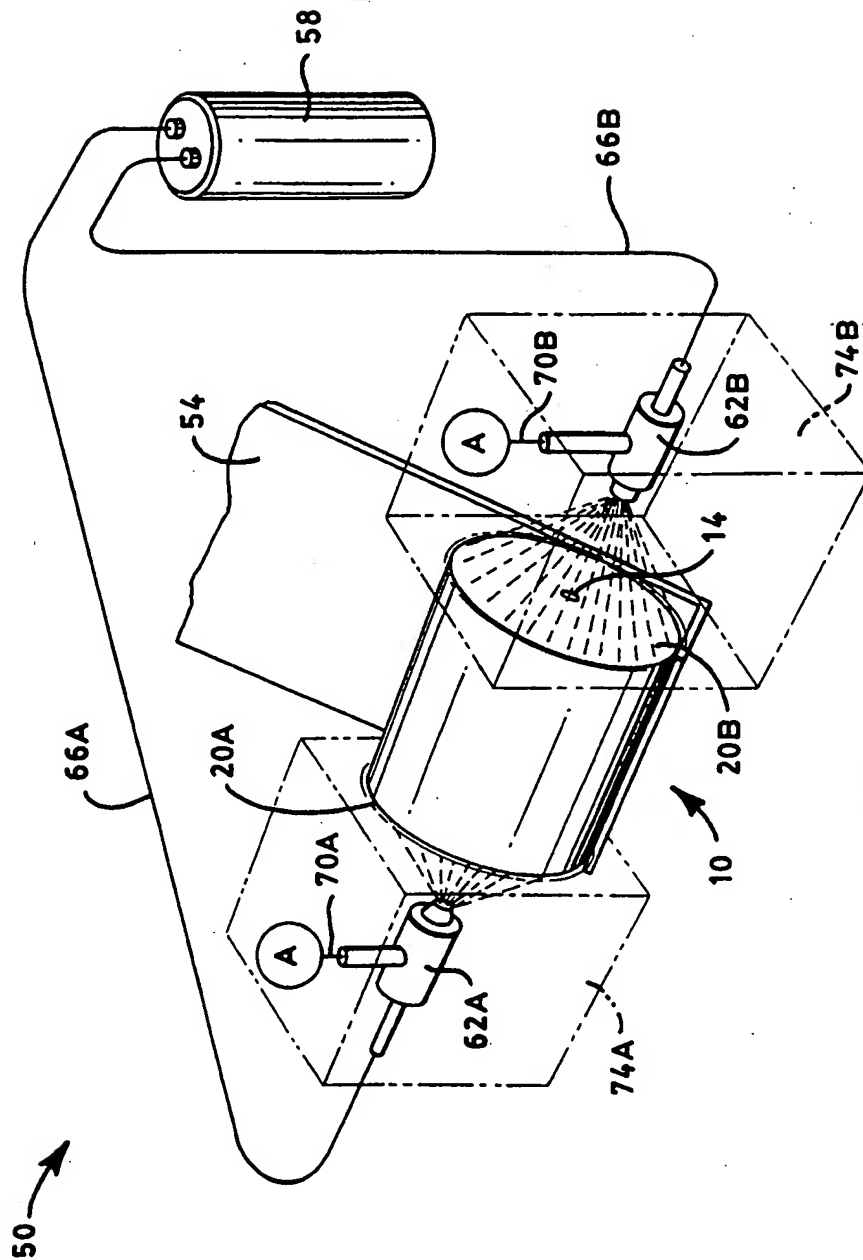


FIG. 2

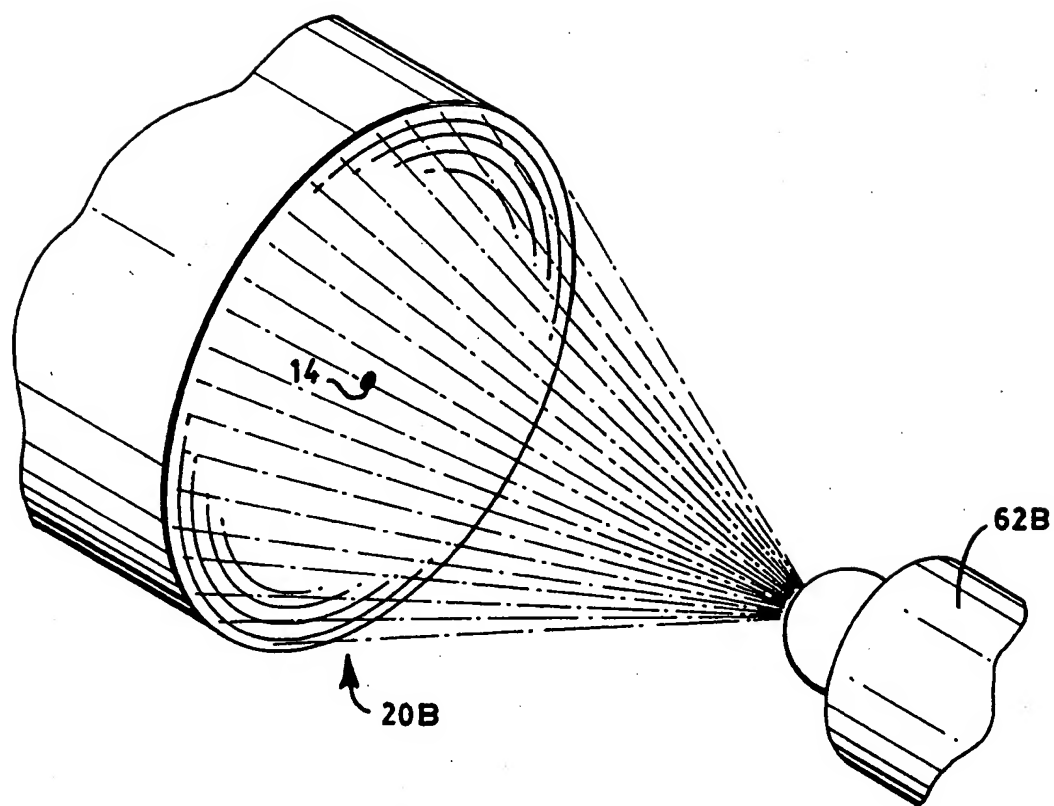


FIG. 3

# INTERNATIONAL SEARCH REPORT

Inte. .onal Application No

PCT/GB 99/02853

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 7 A47K10/38

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 A47K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 106 617 A (P. BOONE) 12 August 1978 (1978-08-12) column 3, line 18 -column 4, line 18; figure 6 ---	1,9,12, 13
X	PATENT ABSTRACTS OF JAPAN vol. 14, no. 424 (M-1024), 12 September 1990 (1990-09-12) & JP 02 166050 A (TADAHIRO ARIMOTO) abstract ---	1,12,13
X	US 4 219 129 A (H. D. SEDWICK) 26 August 1999 (1999-08-26) the whole document --- -/--	1,12,13

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

**Special categories of cited documents :**

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

25 November 1999

Date of mailing of the international search report

02/12/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Delzor, F

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 99/02853

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 387 284 A (J. R. MOODY) 7 February 1995 (1995-02-07)  the whole document ----	1,3-5,9, 12,13, 15-17,21
X	US 4 487 378 A (MASASHI KOBAYASHI) 11 December 1984 (1984-12-11)  the whole document ----	1,3,9, 11,13, 15,21,23
A	PATENT ABSTRACTS OF JAPAN vol. 14, no. 39 (M-924), 24 January 1990 (1990-01-24) & JP 01 271343 A (WAKOUDOU KK) abstract ----	1,3,5,9, 12,13, 15,17
A	WO 94 28226 A (P. ALBERTO) 8 December 1994 (1994-12-08) the whole document ----	1,3,9, 13,16,21
A	GB 1 339 916 A (E. KUSTERS) 5 December 1973 (1973-12-05) the whole document -----	1,3,5, 13,15,17

# INTERNATIONAL SEARCH REPORT

Information on patent family members

Int. onal Application No

PCT/GB 99/02853

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4106617 A	15-08-1978	NONE	
JP 02166050 A	26-06-1990	NONE	
US 4219129 A	26-08-1980	NONE	
US 5387284 A	07-02-1995	AT 182314 T CA 2144001 A DE 69510849 D EP 0675063 A ES 2133666 T US 5467936 A	15-08-1999 08-09-1995 26-08-1999 04-10-1995 16-09-1999 21-11-1995
US 4487378 A	11-12-1984	JP 1423610 C JP 58200719 A JP 62034664 B AU 565446 B AU 2131883 A BR 8207205 A CA 1223567 A CH 660293 A DE 3241920 A DK 497783 A FR 2554799 A GB 2120206 A,B KR 8701478 B NL 8204499 A,B, SE 455367 B SE 8306035 A SU 1369670 A	15-02-1988 22-11-1983 28-07-1987 17-09-1987 23-05-1985 17-04-1984 30-06-1987 15-04-1987 24-11-1983 01-05-1985 17-05-1985 30-11-1983 13-08-1987 16-12-1983 11-07-1988 03-05-1985 23-01-1988
JP 01271343 A	30-10-1989	JP 1969248 C JP 6099062 B	18-09-1995 07-12-1994
WO 9428226 A	08-12-1994	IT 1265037 B	28-10-1996
GB 1339916 A	05-12-1973	DE 2200357 A	20-07-1972

